


MSR-2XFX-3U (01)

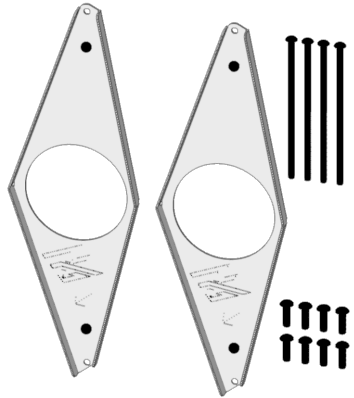

Included Hardware:

- (01) 2- Top clamps for computers
 - (02) 4- 8-32 x 4" Pan Head Screws
 - (03) 8- 10-32 x 5/8" Rack Screws
- (If your rack enclosure is threaded different you will need alternate screws up to 1/4" diameter)

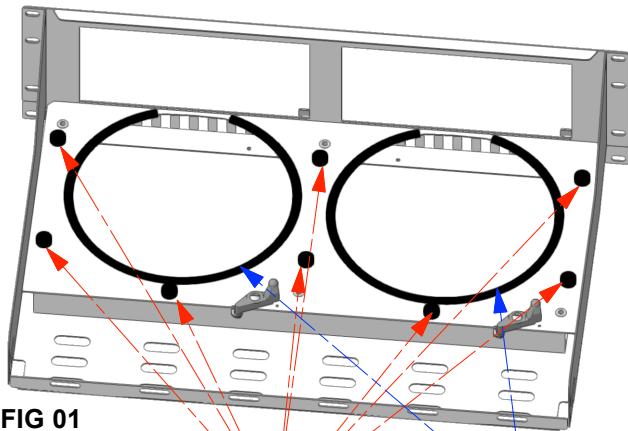


FIG 01

Rubber Positioning Inserts

Rubber Grommet

Centers the computer for proper alignment into rack kit.

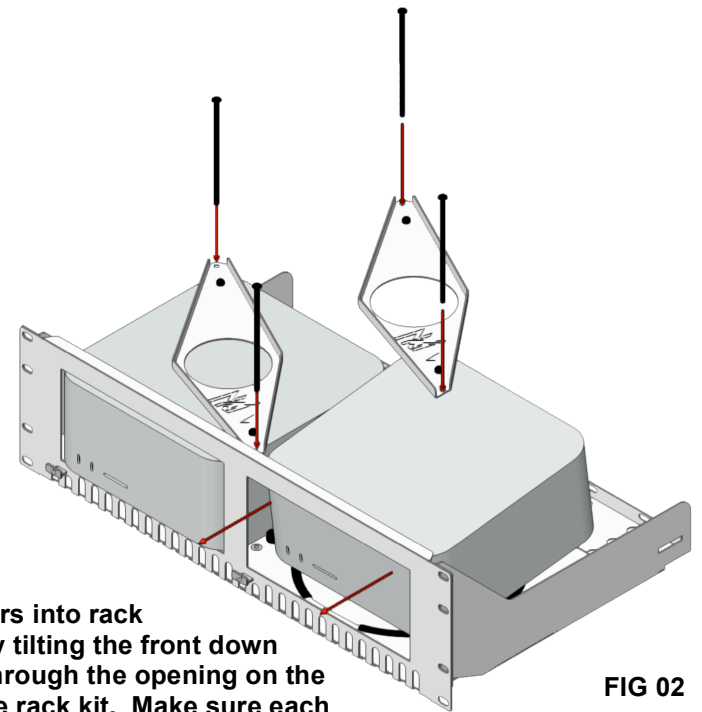


FIG 02

Step 01

Place Computers into rack kit as shown by tilting the front down and sliding it through the opening on the front face of the rack kit. Make sure each computer is fully seated between all the rubber positioning inserts shown in FIG 01. The computer should be resting on top of the rubber grommet shown in FIG 01.

Step 02

Place the top clamps (Included hardware 01) so that the arrow is pointed to the front of the rack. The logo on top of the computer will be visible in the hole in the top clamp. Secure the clamps with the included 8-32 x 4" screws (Included hardware 02) Do not over tighten the screws. Only the rubber pad on the clamp should be touching the computer. Overtightening the clamp can damage the computer and rack kit.



Apple and Mac are trademarks of Apple Inc., registered in the U.S. and other countries and regions. Their use here is to denote compatibility and not an endorsement.

**Not Included

<https://www.mk1manufacturing.com/>

PART: MSR-2XFX-3U (REV01)

DRAWN BY: MVC


08/01/2022

FILE: MSR-2XFX-3U.VXW

©2022 MK1 Studio, LLC

MSR-2XFX-3U (02)


FIG 03

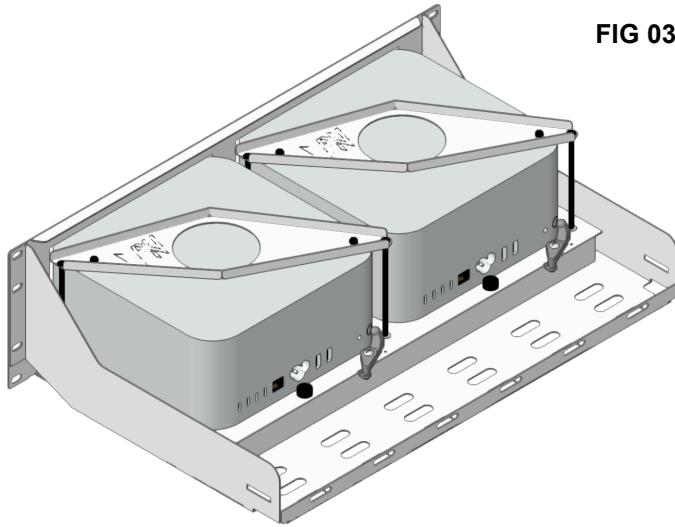

Step 03

If the optional power buttons are installed, it is important to test their function prior to installing in the rack enclosure. When the button is pressed on the front of the rack the plastic toggle on the rear will press the power button.

FIG 04

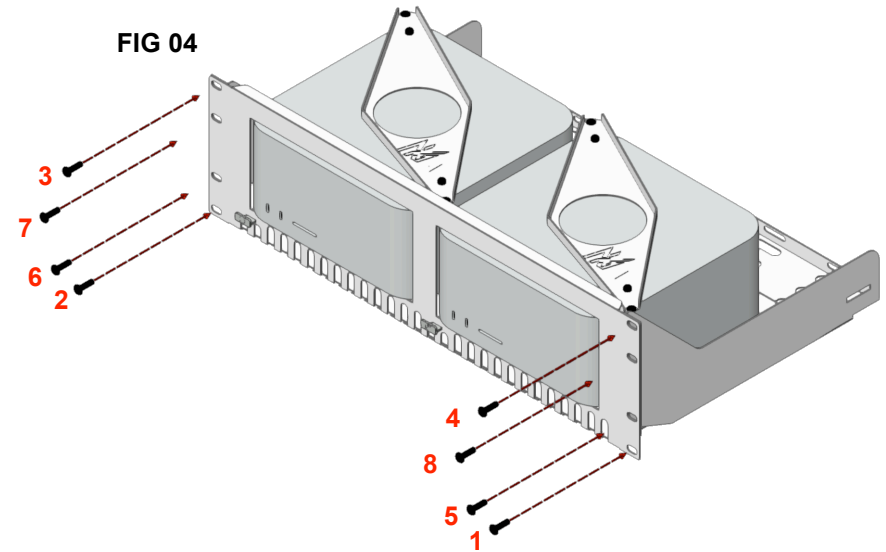

Step 04

It is recommended that for fixed racks the computers be installed in the rack kit prior to the kit being installed in the rack. If you have enough room above your rack location the computers can be installed after. Using the Supplied 10-32 rack screws(Included hardware 03), affix the rack kit in the recommended order for easiest installation. If your rack enclosure has different threading than 10-32 you will need to supply alternate screws. The holes in the Rack Kit will accommodate up to 1/4" diameter screws.

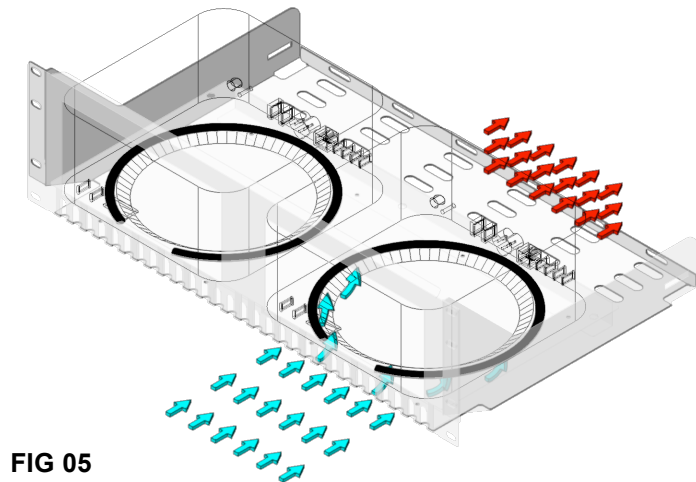


FIG 05

Cooling

The MSR-2XFX-3U is designed to allow the computer to pull cool air from the front of the rack and pass it to the rear. Do not obstruct the front cooling vents on the face of the rack kit. If only one computer is being used it is recommended to install our blank insert that will prevent the computer from recycling warm air.